

Everest G12R Series 435-460W

96-cell Bifacial HJT Half-cell
Double-glass Solar Module



HJT-0BB Technology
Shorter current transport path, better low-light performance, and higher power generation.



Sealing with PIB
Stronger moisture resistance, greater air impermeability to extent module lifespan.




Ideal Choice for Rooftop Photovoltaic Systems
Bifacial power generation, suitable for residential, industrial and commercial rooftop projects.



Complete System and Product Certifications:

IEC61215, IEC61730
ISO9001: 2015 Quality Management System
ISO14001: 2015 Environment Management System
ISO45001: 2018 Occupational Health and Safety
IEC62941: 2019 Terrestrial Photovoltaic (PV) Modules-quality System for PV Module Manufacturing
IEC/TS62994: 2019 Photovoltaic (PV) Modules Through the Life Cycle-environmental Health and Safety (EH&S) Risk Assessment-general Principles and Nomenclature

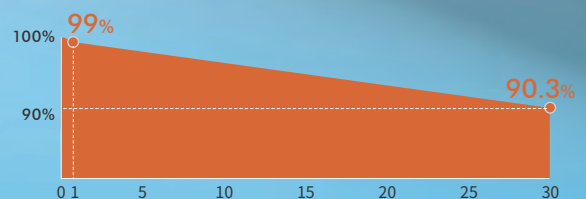

* First year power degradation $\leq 1\%$
* Annual power degradation (2-30 year) $\leq 0.3\%$
* Power output until the 30th year $\geq 90.3\%$


HSN-210R-B96 435-460W

96-Half-Cell Bifacial HJT Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re


Engineering Drawings

Unit: mm

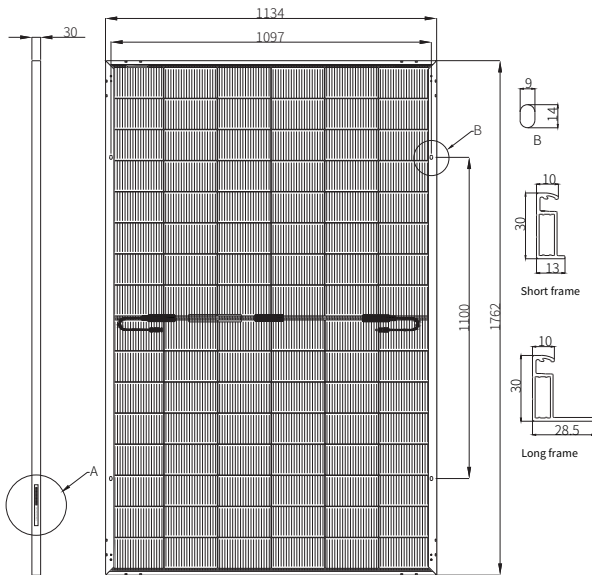

I-V Curve

(HSN-210R-B96DSN460)

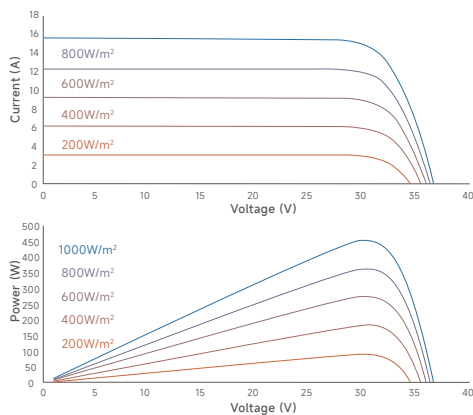

Temperature Coefficients

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+70°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II

Mechanical Characteristics

Cell Type	HJT
No. of Cells	96 (6x16)
Dimensions	1762x1134x30mm
Weight	21.6 kg
Junction Box	IP68
Cable	4mm²; ±1250mm or customized; UV resistant
Connector	PV-H1 / MC4-Evo 2 / Others
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 1.6mm

Electrical Characteristics

STC

HSN-210R-B96	DSN435	DSN440	DSN445	DSN450	DSN455	DSN460
Maximum Power (Pmax/W)	435	440	445	450	455	460
Module Efficiency (%)	21.8	22.0	22.3	22.5	22.8	23.0
Voltage at Pmax (Vmp/V)	30.50	30.61	30.72	30.83	30.94	31.05
Current at Pmax (Imp/A)	14.27	14.38	14.49	14.60	14.71	14.82
Open Circuit Voltage (Voc/V)	36.42	36.52	36.62	36.72	36.82	36.92
Short Circuit Current (Isc/A)	15.20	15.31	15.42	15.53	15.64	15.75

STC: AM1.5, 1000W/m², 25°C.

BNPI

	488	493	499	505	510	515
Maximum Power (Pmax/W)	488	493	499	505	510	515
Voltage at Pmax (Vmp/V)	30.61	30.72	30.83	30.94	31.05	31.16
Current at Pmax (Imp/A)	15.94	16.07	16.19	16.31	16.44	16.56
Open Circuit Voltage (Voc/V)	36.55	36.65	36.75	36.85	36.95	37.05
Short Circuit Current (Isc/A)	17.05	17.17	17.29	17.42	17.54	17.66

BNPI: AM1.5, 1000W/m², 135W/m², 25°C.

NOCT

	332	336	340	344	347	351
Maximum Power (Pmax/W)	332	336	340	344	347	351
Voltage at Pmax (Vmp/V)	29.12	29.23	29.34	29.45	29.55	29.65
Current at Pmax (Imp/A)	11.40	11.49	11.58	11.67	11.76	11.84
Open Circuit Voltage (Voc/V)	34.76	34.86	34.95	35.05	35.14	35.24
Short Circuit Current (Isc/A)	12.15	12.24	12.32	12.41	12.50	12.59

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Packaging

	40'HQ
Modules Per Pallet	36
Pallets Per Container	26
Modules Per Container	936



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2026

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China
Tel: 0086-563-3318095 www.huasunsolar.com
sales@huasunsolar.com customerservice@huasunsolar.com

With the development of technology and the iterative updating of products, the technical specification of products released by HUASUN in the future may differ from those listed in this datasheet. HUASUN reserves the right to change the technical specification of the products at any time without prior notice, and the technical specification of the products ordered by the customers are subject to the technical specification agreed upon in the legally binding contract signed by both parties. The final interpretation of the datasheet is reserved by HUASUN.

2.0_20251224_D