


# SII SERIES

Multiple upgrades were forged into one





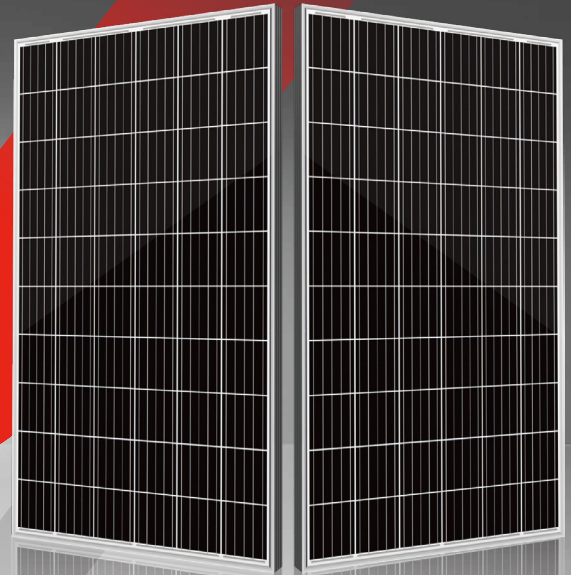

## 315-330w



### ● SII SERIES

On the 158.75mm silicon wafers, seraphim rely on the advanced technology and unique understanding of materials throughout the product design, to ensure the stable power output of the module, and effectively improve the efficiency and reliability of the modules.

### ● KEY FEATURES

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BOS and improve ROI.
-  **PVEL** Outstanding reliability proven by PVEL for stringent environment condition :
  - sand, acid, and alkali, hail stones,
  - 2400pa wind load and 5400pa snow load.
  - Anti-PID

### ● QUALITY SYSTEM

ISO19001 / ISO14001 / OHSAS18001


### ● PRODUCT CERTIFICATION



### ● INSURANCE

**PICC**

### ● WARRANTY

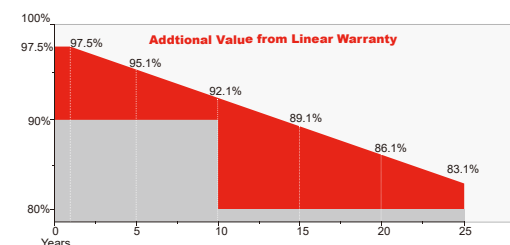

Guarantee on product material and workmanship



linear power output warranty



**JIANGSU SERAPHIM SOLAR SYSTEM CO., LTD**

Add: No.1-2, HengyaoRd, HenglinTown, Wujin District, 213000, Changzhou, China  
 Tel: +86-519-69699879 Fax: +86-519-88786181 Email: info@seraphim-energy.com


**SRP-6MB(-HV) SERIES 6 INCH 60 CELLS**

**Electrical Characteristics**

Module Type	SRP-315-6MB SRP-315-6MB-HV		SRP-320-6MB SRP-320-6MB-HV		SRP-325-6MB SRP-325-6MB-HV		SRP-330-6MB SRP-330-6MB-HV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power -P <sub>mp</sub> (W)	315	234	320	238	325	242	330	246
Open Circuit Voltage -V <sub>oc</sub> (V)	40.4	37.3	40.6	37.5	40.8	37.7	41.1	38.0
Short Circuit Current -I <sub>sc</sub> (A)	9.92	8.05	10.02	8.14	10.11	8.21	10.19	8.27
Maximum Power Voltage -V <sub>mp</sub> (V)	32.8	30.9	33.0	31.2	33.2	31.4	33.5	31.7
Maximum Power Current -I <sub>mp</sub> (A)	9.61	7.58	9.70	7.64	9.79	7.70	9.86	7.77
Module Efficiency STC-η <sub>m</sub> (%)	18.88		19.18		19.48		19.78	
Power Tolerance (W)	(0,+4.99)							
Maximum System Voltage (V)	1000VDC / 1500VDC							
Maximum Series Fuse Rating (A)	20A							
Pmax Temperature Coefficient	-0.36 %/°C							
Voc Temperature Coefficient	-0.28 %/°C							
Isc Temperature Coefficient	+0.05 %/°C							
Operating Temperature	-40~+85 °C							
Nominal Operating Cell Temperature	45±2 °C							

STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25°C AM=1.5  
NOCT: Irradiance 800 W/m<sup>2</sup> ambient temperature 20°C wind speed :1m/s Power measurement tolerance: +/-3%

**I-V Curve**

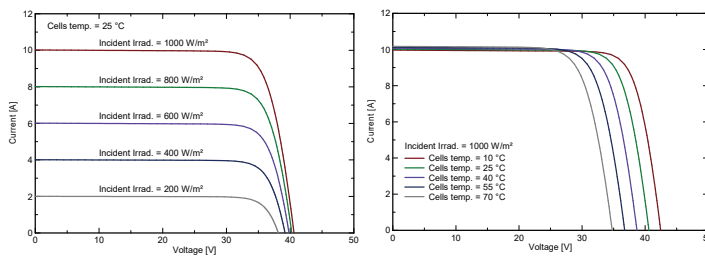

**Mechanical Specifications**


External Dimension	1665 x 1002 x 35mm
Weight	18.5kg
Solar Cells	PERC Mono crystalline 158.75 x 158.75 mm (60pcs)
Front Glass	3.2 mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0 mm <sup>2</sup> , cable length:1000 mm
Mechanical Load	Front side 5400Pa/ Back side 2400Pa

**Packing Configuration**

External Dimension	1665 x 1002 x 35mm	
Container	20'GP	40'HQ
Pieces per Pallet	31	31+2*
Pallets per Container	12	26
Pieces per Container	372	858

\* 31+2 pieces per pallet is the special package which only suits for container transport. For details, please consult SERAPHIM.

**Technical drawing**

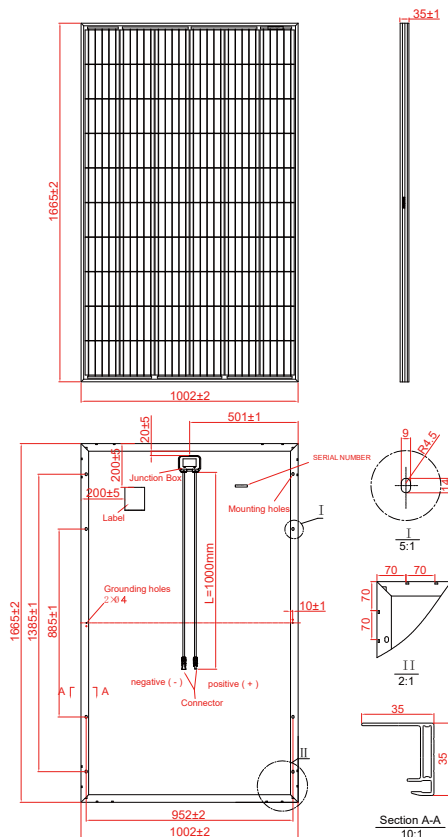

\* All Dimensions in mm.  
\* The above drawing is a graphical representation of the product.  
For engineering quality drawings please contact SERAPHIM.

